



01/2019

Spezial-Steckschlüssel SW44 PSA

Special Socket, 44mm waf, PSA

KL-1340-401



DE

EN

[www.gedore-automotive.com](http://www.gedore-automotive.com)

**GEDORE Automotive GmbH**

Breslauer Straße 41  
78166 - Donaueschingen  
Postfach 1329  
78154 Donaueschingen - GERMANY

T +49 (0) 771 / 8 32 23-0  
F +49 (0) 771 / 8 32 23-90  
info.gam@gedore.com  
www.gedore-automotive.com

**GEDORE TOOLS, INC.**

Only for USA, Canada & Mexico  
Sólo para EE.UU., Canadá y México  
Seulement pour les USA, le Canada et le Mexique

7187 Bryhawke Circle, Suite 700  
North Charleston, SC 29418, USA  
Phone +1-843 / 225 50 15  
Fax +1-843 / 225 50 20  
info@gedorettools.com

**GEDORE WELTWEIT / GEDORE WORLDWIDE**

Weltweite GEDORE Servicestellen / Niederlassungen finden Sie im Internet unter: [www.gedore.com](http://www.gedore.com)  
Worldwide GEDORE service centers / offices are listed on the Internet at: [www.gedore.com](http://www.gedore.com)


KL-1340-401

6-kant Sonderprofil (SW 44 mm)  
Special hex profile (waf 44mm)



1/2"

**Anwendungsbeispiel / Example of use**

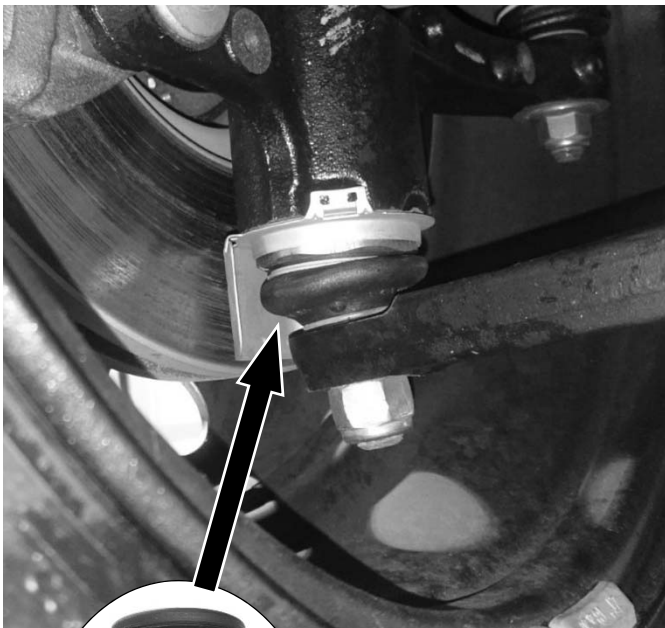

**KL-1340-401 - Spezial-Steckschlüssel SW44 PSA**

Passend für Citroën, Peugeot und Toyota mit geschraubten Vorderachs-Traggelenken (SW 44 mm). Eingebaut z.B. bei Toyota ProAce II, ProAce Verso; Citroën Jumpy III, Spacetourer; Peugeot Expert III.

**Anwendungsbereich**

Erforderlich zum schnellen und fachgerechten Lösen und Festdrehen von geschraubten Traggelenken am Vorderachs-Querlenker, beim Ersetzen eines ausgeschlagenen Traggelenks.

**Technische Daten**

Schlüsselweite:..... 44 mm  
Antrieb:..... 1/2"  
Länge:..... 85 mm  
Profil: ..... 6-kant Sonderprofil

**⚠️ Vorschriften und Hinweise**

- Arbeiten an Fahrzeugen nur durch Fachpersonal unter Beachtung der Hinweise, Vorschriften und Sicherheitsvorschriften des Fahrzeugherstellers durchführen!
- Für alle Arbeiten am Fahrzeug gelten nur die vom Fahrzeughersteller vorgegebenen Daten.

**KL-1340-401 - Special Socket, 44mm waf, PSA**

Applicable to screw-in type suspension ball joints having a waf size of 44mm as found at the front axle of Citroën, Peugeot and Toyota vehicles.

For example: Toyota PROACE II, PROACE VERSO; Citroën Jumpy III, Spacetourer; Peugeot Expert III.

**Field of Application**

For the professional loosening and tightening of front wishbone screw-in type suspension ball joints. An indispensable tool when replacing damaged or worn suspension ball joints in these applications.

**Technical Data**

Waf size:..... 44mm  
Drive:..... 1/2"  
Length:..... 85mm  
Profile: ..... special hex profile

**⚠️ Warnings and Notes**

- Any work on vehicles should only be performed by qualified specialist personnel observing and complying with the directions, provisions, and safety regulations specified by the vehicle manufacturer.
- Always refer to the vehicle manufacturer's data and instructions as only these apply to all work that is carried out on the vehicle.