





Features

- •Constant Voltage + Constant Current mode output
- •Metal housing with class I design
- •Built-in active PFC function
- •IP67 / IP65 rating for indoor or outdoor installations
- •Function options: output adjustable via potentiometer; 3 in 1 dimming
- •Typical lifetime > 62000 hours
- •7 years warranty


Applications

- · LED street lighting
- · LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

HLG-320H series is a 320W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-320H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -40 $^{\circ}$ C ~ +90 $^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-320H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

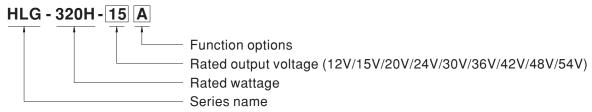

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
С		Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.	By request
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request




SPECIFICATION

MODEL		HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320H-54[
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V		
	CONSTANT CURRENT REGION Note.4		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V		
	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A		
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W		
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p		
	MITTEL & NOISE (MAX.) Note.2				potentiometer)		20011111111	Zoomvpp	230111VP-P	330111 v p-p		
	VOLTAGE ADJ. RANGE	10.8 ~ 13.5V		17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V		
ОИТРИТ							32 ~ 39 V	30 ~ 430	43 ~ 32 V	49~300		
	CURRENT ADJ. RANGE			i i	potentiometer)	5.35 ~ 10.7A	1 1F - 0 0A	3.8 ~ 7.65A	2.25 6.74	2.07 5.05		
	VOLTACE TOLEDANCE NO.	11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A					3.35 ~ 6.7A	2.97 ~ 5.95		
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%		
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%		
		2500ms,80m		500ms,80ms/2	230VAC							
	HOLD UP TIME (Typ.)	15ms / 115VA	C, 230VAC									
	VOLTAGE RANGE Note.5	90 ~ 305VAC										
	VOLIAGE NAME Mote.5	(Please refer to "STATIC CHARACTERISTIC" section)										
	FREQUENCY RANGE	47 ~ 63Hz										
	DOMED FACTOR (Turn)	PF≧0.98/115	SVAC, PF≧0.9	5/230VAC, PF	≥0.94/277VA	C @ full load						
	POWER FACTOR (Typ.)	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)										
	TOTAL HARMONIO DIGTORTION	THD< 20% (@ load≥50% / 115VAC,230VAC; @ load≥75% / 277VAC)										
	TOTAL HARMONIC DISTORTION	(Please refe	r to "TOTAL HA	ARMONIC DIS	STORTION (TH	D)" section)						
INPUT	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%		
	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%		
	AC CURRENT (Typ.)	3.5A / 115VA			1.45A / 277VAC				1			
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010µs measured at 50% lpeak) at 230VAC; Per NEMA 410										
	MAX. No. of PSUs on 16A	2.2.2										
	CIRCUIT BREAKER	1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC										
	LEAKAGE CURRENT	<0.75mA / 277VAC										
PROTECTION :	OVER CURRENT Note.4	95 ~ 108%										
	OVER CORRENT Note.4	Constant current limiting, recovers automatically after fault condition is removed										
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed										
	DN									59 ~ 65V		
	OVER VOLTAGE	Shut down and latch off o/p voltage, re-power on to recover										
	OVER TEMPERATURE Shut down and latch off o/p voltage, re-power on to recover											
	WORKING TEMP.	Tcase= -40 ~	+90°C (Pleas	e refer to "OU	TPUT LOAD vs	TEMPERATU	JRE" section)					
	MAX. CASE TEMP.	Tcase= +90°	3				,					
	WORKING HUMIDITY	20 ~ 95% RH	non-condensii	na								
ENVIRONMENT	STORAGE TEMP., HUMIDITY			<u> </u>								
	TEMP. COEFFICIENT	±0.03%/°C										
	VIBRATION			ole period for	72min. each ald	ong Y V 7 ava						
	- ISKATION							nt: GR10510-1	GR10510 14			
SAFETY &	SAFETY STANDARDS	UL8750(type"HL"), CSA C22.2 No. 250.0-08; TUV EN61347-1, EN61347-2-13 independent; GB19510.1, GB19510.14;										
	WITHETAND VOLTAGE	IP65 or IP67 (except for HLG-320H C-type); J61347-1, J61347-2-13 (except for HLG-320H C-type) approved										
	WITHSTAND VOLTAGE											
EMC	ISOLATION RESISTANCE	,	,		00VDC / 25°C/		0.15	I> 500() =:::	14000 0 0 =:::	1000 0 0		
	EMC EMISSION	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (@ load≥50%); EN61000-3-3, EN61000-3-3, GB17743 and GB17625.1								1000-3-3,		
	EMC IMMUNITY				EN61547, EN5	5024, liaht indi	ustry level (sur	ge immunity Li	ne-Earth 4KV. I	Line-Line 2K'		
	MTBF	157.1K hrs m		3K-217F (25°C		, 5	, . , , , , , , , , , , , , , , , , , ,	J, =				
	DIMENSION	252*90*43.8mm (L*W*H)										
	PACKING	1.88Kg; 8pcs/16Kg/0.92CUFT										
	All parameters NOT special	U .			out_rated_curre	nt and 25°C o	f amhient tem	nerature				
NOTE	Ripple & noise are measure	-		-				-	apacitor.			
	3. Tolerance : includes set up		-	-				,				
	4. Please refer to "DRIVING M		_	-								
i	5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.											
	6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.											
	6. Length of set up time is me	7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the										
	7. The driver is considered as								Il be affected b	y the		
	7. The driver is considered as complete installation, the fin	al equipment r	manufacturers	must re-qualif	y EMC Directiv	e on the comp	olete installatio	n again.		y the		
	The driver is considered as complete installation, the fin To fulfill requirements of the	al equipment r	manufacturers	must re-qualif	y EMC Directiv	e on the comp	olete installatio	n again.		y the		
	7. The driver is considered as complete installation, the fin	al equipment reg	manufacturers Julation for ligh	must re-qualif iting fixtures, th	y EMC Directiv	re on the comp can only be us	olete installationsed behind a s	n again. witch without p	permanently			


■ BLOCK DIAGRAM

Fosc: 65KHz

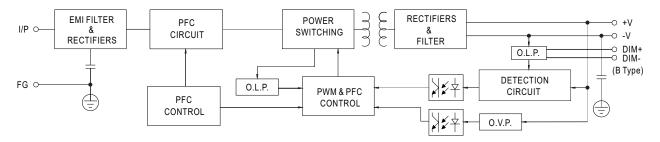

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

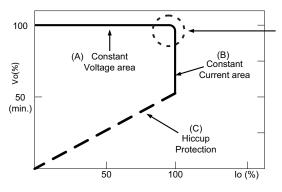


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

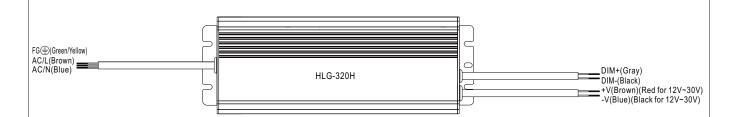


※ 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 1 ~ 10VDC

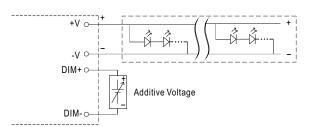


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

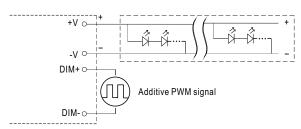



"DO NOT connect "DIM- to -V"


Applying additive resistance:

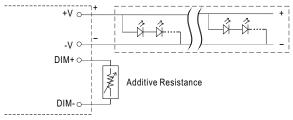

"DO NOT connect "DIM- to -V"










Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

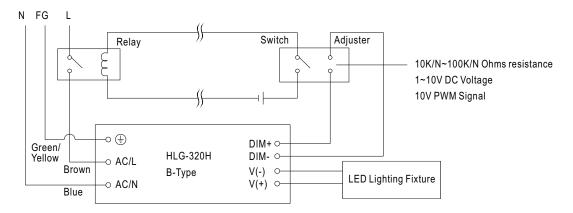

Using a switch and relay can turn ON/OFF the lighting fixture.



2

50%

60%


70%

LOAD

80%

90%

100%

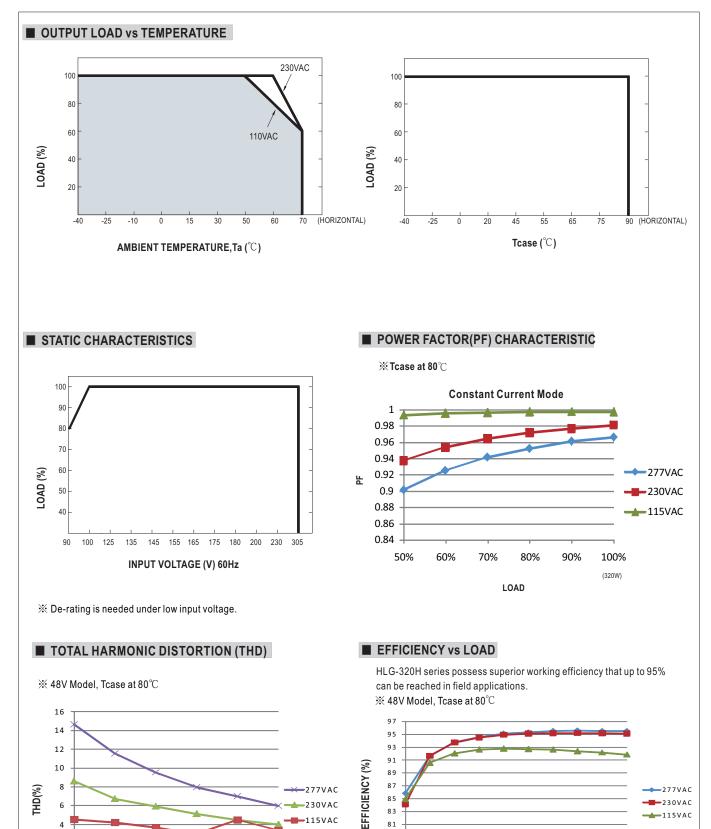

79

75

30%

50%


60% 70%

LOAD


80%




■ LIFETIME

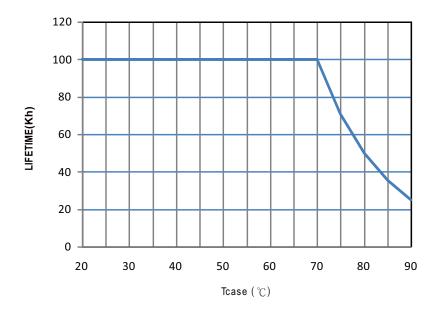



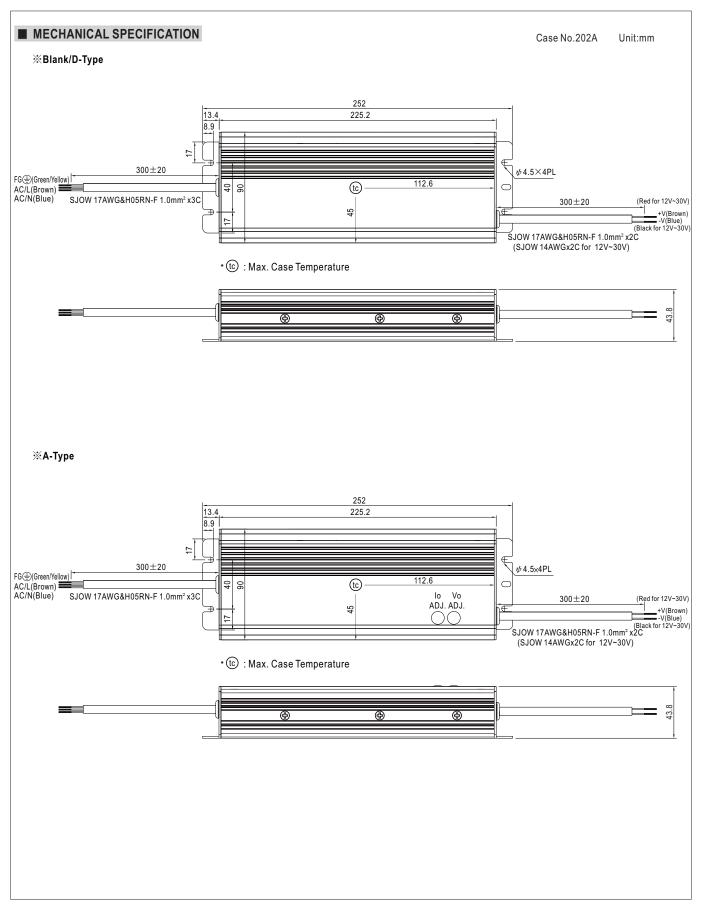



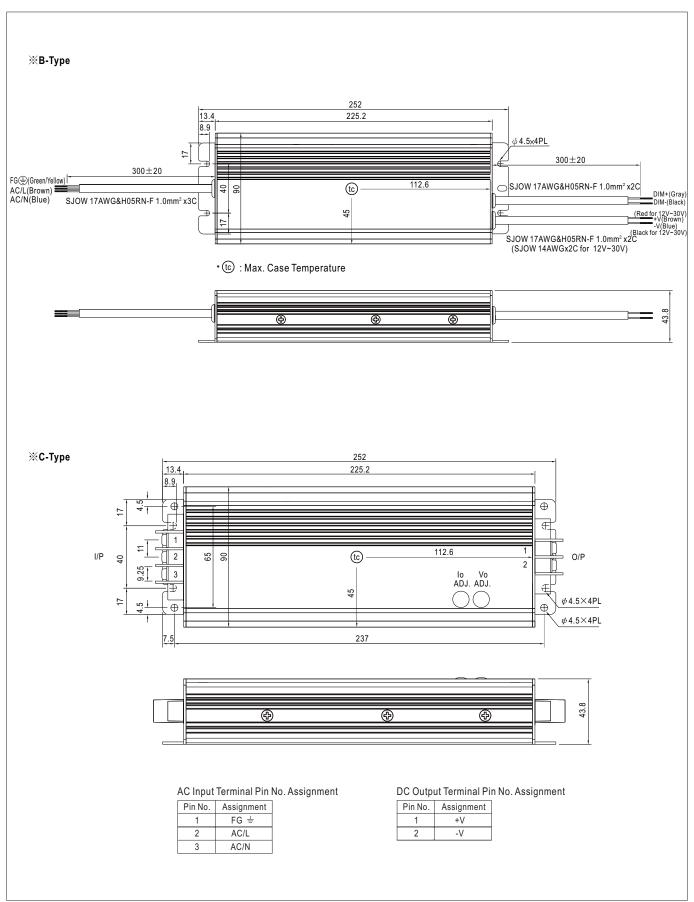


LED Lamp



■ WATERPROOF CONNECTION

Waterproof connector

 $Water proof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-320H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$

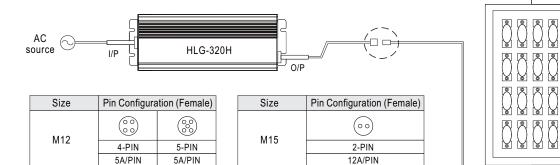


Order No.

Suitable Current

X Cable Joiner

Order No.

Suitable Current

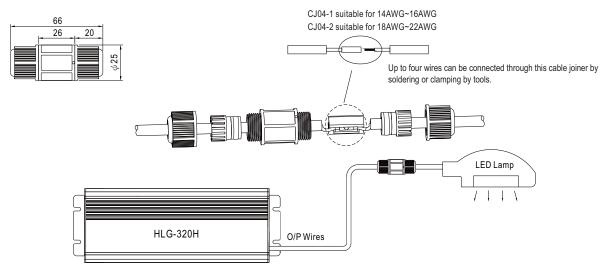

M15-02

12A max

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.


M12-05

10A max.

M12-04

10A max.

※ Junction Box Option

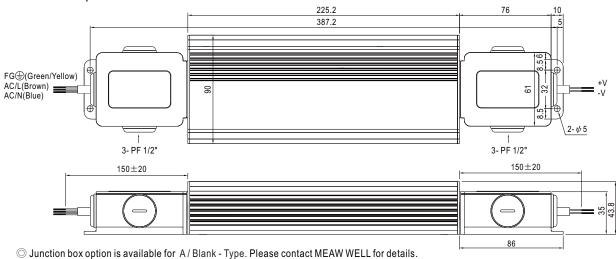

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html